




JCB-18BPOS-125

Original Instructions

GENERAL WARNINGS & DISPOSAL

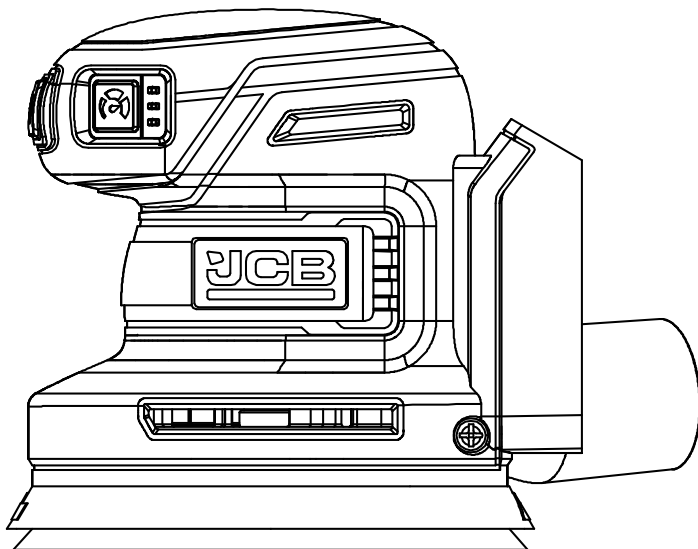

To reduce the risk of injury, the user must read the instruction manual.



This symbol is used throughout this manual to warn the user about potential risks. Please read & understand these sections before using the device.



Personal Protective Equipment (P.P.E.), such as ear defenders, eye protection, safety gloves and a dust mask, must be worn during the operation of the device.



The device must not be exposed to rain or immersed in water.



Do not allow any part of the device to come into contact with flames, or to catch fire.



Do not expose battery pack or tool to fire or excessive temperatures.



Do not dispose of batteries in household waste. Return exhausted batteries to a local collection or recycling point.



This product has been marked with a symbol relating to removing electric and electronic waste. The product should not be discarded with household waste but must be returned to a collection system which conforms to the EU Directive 2012/19/EU or the UK Waste Electrical and Electronic Equipment Regulations 2013. It will then be recycled or dismantled in order to reduce the impact on the environment. Electric and electronic equipment can be hazardous for the environment and for human health since they contain hazardous substances.

The month and year of manufacture can be found within the product serial number e.g. MMYYPXXXXXXX. Where production month (MM) and production year (YY) are included.
JCB-18BPOS-125 Designation of the tool: 18 - 18Vdc, OS - Orbital Sander

Contents

GENERAL POWER TOOL SAFETY WARNINGS	4
1. Work area safety	4
2. Electrical safety	4
3. Personal safety	4
4. Power tool use and care	5
5. Battery tool use and care	5
6. Service	6
TOOL SPECIFIC SAFETY WARNINGS	7-8
CHARGER SAFETY	9
COMPONENT LIST	10
TOOL TECHNICAL DATA	11
BATTERY TECHNICAL DATA	11
CHARGER TECHNICAL DATA	11
NOISE INFORMATION	11
VIBRATION INFORMATION	12
BATTERY OPERATION	13
OPERATING INSTRUCTIONS	14
ACCESORY INFORAMTION	15
MAINTENANCE & STORAGE	16
WARRANTY	17
DECLARATION OF CONFORMITY	18



GENERAL POWER TOOL SAFETY WARNINGS

WARNING!

Read all safety warnings, instructions and specifications provided with the charger.

Failure to follow all instructions listed below may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference.

The term “power tool” in the warnings refers to your mains operated (corded) power tool or battery operated (cordless) power tool.

1. Work area safety

Keep work area clean and well lit.

Cluttered or dark areas invite accidents.

Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust. Power tools create sparks which may ignite the dust or fumes.

Keep children and bystanders away while operating a power tool. Distractions can cause you to lose control.

2. Electrical safety

Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools. Unmodified plugs and matching outlets will reduce risk of electric shock.

Avoid body contact with earthed or grounded surfaces, such as pipes, radiators, ranges and refrigerators. There is an increased risk of electric shock if your body is earthed or grounded.

Do not expose power tools to rain or wet conditions. Water entering a power tool will increase the risk of electric shock.

Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep the cord away from heat, oil, sharp edges or moving parts. Damaged or entangled cords increase the risk of electric shock.

When operating a power tool outdoors, use an extension cord suitable for outdoor use. Use of a cord suitable for outdoor use reduces the risk of electric shock.

If operating a power tool in a damp location is unavoidable, use a residual current device (RCD) protected supply. Use of an RCD reduces the risk of electric shock.

3. Personal safety

Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication. A moment of inattention while operating power tools may result in serious personal injury.

Use personal protective equipment.

Always wear eye protection. Protective equipment such as a dust mask, non-skid safety shoes, hard hat or hearing protection used for appropriate conditions will reduce personal injuries.

Prevent unintentional starting. Ensure the switch is in the off position before connecting to power source and/or battery pack, picking up or carrying the tool. Carrying power tools with your finger on the switch or energising power tools that have the switch on invites accidents.

Remove any adjusting key or wrench before turning the power tool on. A wrench or a key left attached to a rotating part of the power tool may result in personal injury.

Do not overreach. Keep proper footing and balance at all times. This enables better control of the power tool in unexpected situations.

Dress properly. Do not wear loose clothing or jewellery. Keep your hair and clothing away from moving parts. Loose clothes, jewellery or long hair can be caught in moving parts.

If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used. Use of dust collection can reduce dust-related hazards.

Do not let familiarity gained from frequent use of tools allow you to become complacent and ignore tool safety principles. A careless action can cause severe injury within a fraction of a second.

4. Power tool use and care

Do not force the power tool. Use the correct power tool for your application. The correct power tool will do the job better and safer at the rate for which it was designed.

Do not use the power tool if the switch does not turn it on and off. Any power tool that cannot be controlled with the switch is dangerous and must be repaired.

Disconnect the plug from the power source and/or remove the battery pack, if detachable, from the power tool before making any adjustments, changing accessories, or storing power tools. Such preventive safety measures reduce the risk of starting the power tool accidentally.

Remove any adjusting key or wrench before turning the power tool on. A wrench or a key left attached to a rotating part of the power tool may result in personal injury.

Do not overreach. Keep proper footing and balance at all times. This enables better control of the power tool in unexpected situations.

Dress properly. Do not wear loose clothing or jewellery. Keep your hair and clothing away from moving parts. Loose clothes, jewellery or long hair can be caught in moving parts.

If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used. Use of dust collection can reduce dust-related hazards.

Do not let familiarity gained from frequent use of tools allow you to become complacent and ignore tool safety principles. A careless action can cause severe injury within a fraction of a second.

5. Battery tool use and care

When the battery pack is not in use, keep it away from other metal objects, like paper clips, coins, keys, nails, screws or other small metal objects that can make a connection from one terminal to another. Shorting the battery terminals together may cause burns or a fire.

Under abusive conditions, liquid may be ejected from the battery; avoid contact. If contact accidentally occurs, flush with water. If liquid contacts eyes, additionally seek medical help. Liquid ejected from the battery may cause irritation or burns.



Do not use a battery pack or tool that is damaged or modified. Damaged or modified batteries may exhibit unpredictable behaviour resulting in fire, an explosion or risk of injury.

Do not expose a battery pack or tool to fire or excessive temperature. Exposure to fire or temperature above 130 °C may cause explosion.

Follow all charging instructions and do not charge the battery pack or tool outside the temperature range specified in the instructions. Charging improperly or at temperatures outside the specified range may damage the battery and increase the risk of fire.

In Case of Fire or Thermal Runaway, follow these steps:

1. If the battery catches fire or shows signs of thermal runaway (e.g. swelling, smoke, hissing, or intense heat):
2. Evacuate the Area Immediately – Ensure personal safety first. Move away from the battery.
3. Do Not Attempt to Extinguish with Water – Use a Class D fire extinguisher or dry sand if available.
5. Call Emergency Services – Contact your local fire department and inform them it is a lithium battery fire.
6. Do Not Handle or Move the Battery – It may explode or release toxic gases.

Battery Disposal

To safely dispose of lithium-ion batteries, do not place them in general waste or incinerate them, as they pose a fire and environmental hazard. Instead, take used or damaged batteries to a certified recycling centre or an approved battery disposal facility. Always follow local regulations and guidelines for hazardous waste disposal. Before transport, cover the battery terminals with non-conductive tape to prevent short circuits. Proper disposal helps prevent pollution and allows valuable materials to be recovered and reused.

6. Service

Have your power tool serviced by a qualified repair person using only identical replacement parts. This will ensure that the safety of the power tool is maintained.

Never service damaged battery packs. Service of battery packs should only be performed by the manufacturer or authorized service providers.

TOOL SPECIFIC SAFETY WARNINGS

This power tool is intended to function as a sander. Read all safety warnings, instructions, illustrations and specifications provided with this power tool. Failure to follow all instructions may result in electric shock, fire and/or serious injury.

Operations such as grinding, wire brushing or cutting-off are not recommended to be performed with this power tool. Operations for which the power tool was not designed may create a hazard and cause personal injury.

Proper safety gloves are also recommended.

Use the tool for dry sanding only.

Use clamps or a vice to secure your work whenever possible.

Use perforated hook-and-loop sandpaper with the prescribed dimensions.

A sanding sheet that has been used for metal should not be used on other materials.

Do not run the machine with any part of the casing missing or damaged.

Never switch on the sander under load and place it down only after the head has come to a complete stop.

Vibrations can injure the nerves in hands & arms. Keep exposure to vibrations as short as possible.

When carrying out work, always ensure that you have a stable standing position.

Wear ear protectors. Exposure to noise can cause hearing loss.

Wear eye protection. Wear goggles to prevent eyes from exposure to flying particles.

Wear suitable gloves to protect hands. Use of the power tool may expose the operator's hands to hazards including cuts, abrasions and heat

Wear a dust mask. Take protective measures against inhalation of dust. Some materials can contain toxic materials. Also work with dust/ chip extraction when connectable. Check if your dust mask/respirator is specified to be suitable for the material you using working with.

Additional Safety Rules For Orbital Sanders

Hold the power tool by insulated gripping surfaces, when performing an operation where the cutting accessory may contact hidden wiring. Cutting accessory contacting a "live" wire may make exposed metal parts of the power tool "live" and could give the operator an electric shock.

Do not use accessories which are not specifically designed and recommended by the tool manufacturer. Just because the accessory can be attached to your power tool, it does not assure safe operation.

The rated speed of the accessory must be at least equal to the maximum speed marked on the power tool. Accessories running faster than their rated speed can break and fly apart.

The outside diameter and the thickness of your accessory must be within the capacity rating of your power tool. Incorrectly sized accessories cannot be adequately guarded or controlled.

Do not use a damaged accessory. Before each use inspect the accessory such as abrasive wheels for chips and cracks, backing pad for cracks, tear or excess wear, wire brush for loose or cracked wires. If the power tool or accessory is dropped, inspect for damage or install an undamaged accessory.

After inspecting and installing an accessory, position yourself and bystanders away from the plane of the rotating accessory and run the power tool at maximum no-load speed for one minute. Damaged accessories will normally break apart during this test time.

Kickback and Related Warnings

Kickback is a sudden reaction to a pinched or snagged rotating wheel, backing pad, brush or any other accessory. Pinching or snagging causes rapid stalling of the rotating accessory which in turn causes the uncontrolled power tool to be forced in the opposite direction of the accessory's rotation at the point of the binding.

For example, if an abrasive wheel is snagged or pinched by the workpiece, the edge of the wheel that is entering into the pinch point can dig into the surface of the material, causing the wheel to climb or kick out. The wheel may either jump toward or away from the operator, depending on direction of the wheel's movement at the point of pinching. Abrasive wheels may also break under these conditions.

Kickback is the result of power tool misuse and/or incorrect operating procedures or conditions and can be

avoided by taking proper precautions as given below.

Maintain a firm grip on the power tool and position your body and arm to resist kickback forces. Never place your hand near the rotating accessory. Accessory may kickback over your hand.

Do not position your body in the area where power tool will move if kickback occurs. Kickback will propel the tool in direction opposite to the wheel's movement at the point of snagging.

Use special care when working corners, sharp edges etc. Avoid bouncing and snagging the accessory. Corners, sharp edges or bouncing have a tendency to snag the rotating accessory and cause loss of control or kickback.



CHARGER SAFETY

WARNING!

Read all safety warnings, instructions and specifications provided with the charger. Failure to follow all instructions listed below may result in electric shock, fire and/or serious injury. **Save all warnings and instructions for future reference.**

To reduce risk of injury, only charge JCB rechargeable batteries.

The charger and battery packs are specifically designed to work together. Other types of batteries may burst causing fire and personal injury.

Do not allow any liquid to get inside the charger. Electric shock may result.

Do not expose the charger to rain or snow.

Under certain conditions with the charger plugged into the power supply, the exposed charging contacts inside the charger can be shorted by foreign materials. Foreign materials of a conductive nature such as, but not limited to, steel, wool, aluminium foil or any buildup of metallic particles should be kept away from charger cavities.

Always unplug the charger from the power supply when there is no battery in the cavity.


Unplug the charger from the power supply before attempting to clean.

Do not operate the charger with a damaged cord or plug. Have them replaced immediately.

The charger is designed to operate on standard 230-240V AC household electrical power. Do not attempt to use it on any other voltage.

If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.

COMPONENT LIST

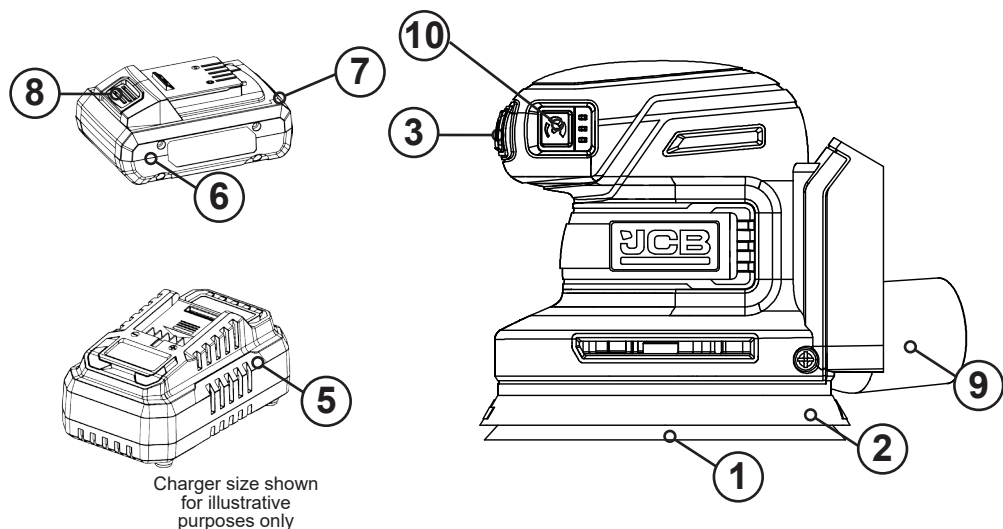

- | | | | |
|----|--|-----|------------------------|
| 1. | ABRASIVE SHEET | 8. | BATTERY RELEASE BUTTON |
| 2. | SANDING DISC/PAD | 9. | DUST COLLECTION BAG |
| 3. | ON/OFF SWITCH | 10. | SPEED SELECTOR |
| 4. | DUST EXTRACTOR PIPE | | |
| 5. | CHARGER* | | |
| 6. | BATTERY PACK | | |
| 7. | BATTERY TEST BUTTON/
CHARGE INDICATOR | | |

*If applicable/NOT included

TOOL TECHNICAL DATA

Rated Voltage	18V d.c.
Rated No-Load Speed	n_0 : 0-7500/0-11500/min
Sanding Disc Diameter	125mm
Pad Fixing Type	Hook & Loop
Motor	
Weight	

LITHIUM ION BATTERY TECHNICAL DATA

Battery Code	Battery Size	Voltage	Battery Capacity	Charge Time (18FC-45 Fast Charger)	Charge Time (18-FC9 Super Fast Charger)	Charge Time (18-DC45 Dual Fast Charger)
18LI-2	Small	18V	2.0Ah	45 mins	45 mins	45 mins
18LI-4HC	Small	18V	4.0Ah	65 mins	45 mins	65 mins
18LI-5	Large	18V	5.0Ah	75 mins	45 mins	75 mins
Times given as a guide only. Battery charge and discharge times dependant on age, usage and condition.						

CHARGER TECHNICAL DATA

Charger Type	Input Data	Output Data
18FC-45 Fast Charger	AC 220-240V, 50-60Hz, 120W	18V d.c. 4.5A
18FC-9 Super Fast Charger	AC 220-240V, 50-60Hz, 185W	20.5V d.c. 9.0A
18DC-45 Dual Fast Charger	AC 220-240V, 50-60Hz, 260W	18V d.c. 2 x 4.5A USB-A & USB-C =5V d.c. 2.4A

NOISE INFORMATION

Noise emission values determined according to EN 62841 and EN 62841-2-1.

A-Weighted Sound Pressure (L_{pA})	76.1 dB(A)
A-Weighted Sound Power (L_{wA})	87.1 dB(A)
K_{pA} & K_{wA}	3 dB(A)
Wear ear protection when sound pressure is over 80 dB(A)	



VIBRATION INFORMATION

Vibration total values (triax vector sum) determined according to EN 62841-1 and EN 62841-2-1

Sanding	Vibration Emission Value ($a_{h, ID}$)	9.5 ms ⁻²
Uncertainty (K)		1.5 ms ⁻²

WARNING!

The vibration emission value of the power tool is tested under EN 62841-1 and EN 62841-2-1, and can vary during operation depending on the following usage conditions:

How the tool is used and the materials being cut or drilled.

The tool being in good condition and well maintained.

Using the correct accessory for the tool and ensuring it is sharp and in good condition.

The tightness of the grip on the handles and if any anti-vibration accessories are used.

The tool being used as intended by its design and these instructions.

The declared vibration total value may also be used in a preliminary assessment of exposure.

THIS TOOL MAY CAUSE HAND-ARM VIBRATION SYNDROME IF USAGE IS NOT ADEQUATELY MANAGED.

WARNING!

To be accurate, an estimation of exposure level in the actual conditions of use should also take account of all parts of the operating cycle. These include times when the tool is switched off and when it is running idle but not actually doing work. This may significantly reduce the total exposure level over the working period, helping to minimize your vibration exposure risk.

ALWAYS use sharp and undamaged bits, chisels, drills and blades.

Maintain this tool in accordance with these instructions and keep well lubricated (where appropriate).

If the tool is to be used regularly then invest in anti-vibration accessories.

Avoid using tools in temperatures of 10°C or less.

Plan your work schedule to spread any high vibration tool use across a number of days.

OPERATING INSTRUCTIONS

Battery

NOTE
Make sure the On/Off Trigger is not pressed in when inserting or replacing the battery. Use with JCB batteries only.

Do not force the battery when connecting it, use moderate pressure. An incorrectly connected battery can damage the battery terminals or the battery socket on the tool.

Use the button on the battery to check the charging status; 4 red LEDs indicates fully charged, where 1 indicates low battery status.

Charging The Battery


WARNING!

After charging for the first time, ensure the battery is completely discharged before placing on charge again. Repeat this charging and discharging cycle 4 to 5 times to ensure battery is correctly conditioned.

Place the battery charger on a level and stable surface. Plug the charger into a suitable power point.

Connect the battery to the charger so that it clicks into place.

Refer to the Battery Charge Level table below for battery charger status as indicated by LED lights.

Unplug the charger from the power point and remove the battery from the charger.

Battery Charge Level

Red LED	Green LED	Battery Charge Status
		Charger is connected to mains power
		Connected battery is charging
		Connected battery is fully charged
		Connected battery has a charging fault
		Charger is outside correct operating temperature range (<0°C / >40°C)

If the LEDs on the charger do not come on when charging:

Check that the charger's mains plug is properly plugged into the power point and that the charger is switched on

Check that the battery is correctly inserted in the charger

Connecting the battery

Connect the battery to the battery socket on the tool so that it clicks into place.

Removing the battery

Press the battery release button and remove the battery from the tool.



OPERATING INSTRUCTIONS

Intended Use

This orbital sander is intended for dry sanding of wood, plastic, metal and filler material as well as painted surfaces.

The power tool must not be modified or used for any other purposes than the ones described in these instructions.

WARNING!

Before using the power tool on metal surfaces, always remove the dust bag from the outlet. Sparks may ignite the dust or the bag.

WARNING!

Prior to any assembly, adjustment or cleaning operations, always disconnect the power tool either from the power supply or remove the battery as appropriate.

ON/OFF Switch (3)

On: Shift the ON/OFF switch slider to "I" position.

Off: Shift the ON/OFF switch slider to "O" position.

Changing a Sanding Sheet

The sanding sheet (1) and sanding pad (2) are provided with a hook and loop attachment system to allow quick and easy changing of sanding and polishing sheets.

NOTE

Ensure the hook and loop surfaces of the sanding pad tool plate, and chosen sheet are as clean as possible, and free from any large debris prior to mounting the sheet.

To attach a new sheet:

Align the edge of the disc with the edge of the pad, and ensure the sheet is centered in the plate.

Apply pressure to the disc, ensuring it is securely fixed across the entire sanding pad.

To remove a disc:

Lift one corner of the sheet and pull off from the sanding pad tool plate.

Changing Disc Speed

Press the Speed Selector button (10) to select one of three speeds. Each speed is indicated by a light

Dust Suction

Efficiency and durability of sandpaper are much improved by dust suction through the apertures in the disc and sandpaper.

The dust collector bag (9) is a push fit onto the dust extractor pipe (4).

Dust collector bag must be emptied regularly.

Ensure waste from the dust bag is disposed of as per local regulatory guidelines.

Dust Extractor Pipe (4)

For sanding jobs that generate increased levels of dust, use a vacuum cleaner.

Disconnect the dust collector bag and connect a pipe from your vacuum cleaner instead.

Sanding Surfaces

Place the machine flat on the workpiece, ensuring the entire sanding disc makes even contact.

Power on the sander.

Apply uniform sanding pressure.

Adjust your pressure to suit the work as required.

NOTE

Less sanding pressure increases the sanding capacity and protects the machine and the sanding paper.

NOTE

The removal capacity and the sanding pattern are determined mainly by the selection of the Sand paper (grade), the speed of the sanding pad and the application pressure.

Rough Sanding

Attach a sand paper with coarse grain.

Apply only light sanding pressure to achieve increased material removal.

NOTE

For faster material removal, do not increase pressure on the tool, instead use a coarser sanding sheet.

Fine Sanding

Attach a sand paper with fine grain.

With moderate pressure, move the machine in a circular pattern or alternately in lengthwise and crosswise directions over the workpiece.

NOTE

Do not tilt the machine during operation. This will apply uneven pressure, and may cause damage to the work piece (e.g. when sanding veneer).

NOTE

To avoid marring the finished surface, switch off the machine, and only lift it from the workpiece when it has come to a stop.

Orbital Sanding

Guide your sander parallel to the working surface and move it in circles or in a cross pattern.

The speed of the orbital motion of the sanding pad is reduced as applied pressure increases.

Selecting The Right Grade Of Sandpaper

NOTE

The correct grade for your application will depend on sanding speed, material and pressure applied. Always test on a scrap piece of material if possible.

Use coarse grits to sand down rough finishes, medium grit to smooth the work and fine grit to finish off.

The higher the grade number, the finer the grit.

For rough work start with a low grade of grit. (e.g. 60 grit) and change to a higher, finer grade (e.g. 120 grit) for finishing.

If you use a fine grade for rough surfaces the sandpaper will clog and need changing more frequently.

Maintenance

WARNING!

Switch off the power tool and disconnect the power (remove battery/unplug) before cleaning and maintenance. This helps avoid the risk of electric shocks and accidental starting.

Wipe the tool with a dry or damp cloth.

Do not use a wet cloth. Do not use detergent that contains solvent or corrosive, abrasive additives.

This risks damaging the surfaces of the tool.

Clear the tool vents and the accessory mount of dust and dirt after each use.

Do not clean ventilation holes by inserting sharp objects in them, such as screwdrivers and other similar objects.

Stubborn contamination in areas hard to access can be removed with compressed air (max 3. bar).

Regularly check all fasteners, screws and bolts to make sure that they are tight. Tighten any loose screws immediately or serious injury could occur.

WARNING!

Never open the power tool. The power tool has no internal parts that the user can service or repair. Never try to repair the power tool yourself. Take to an authorised service centre.

Transport and Storage

If the power tool will remain unused for any length of time, it should be stored in the original packaging.

Store the power tool and battery in a dry, frost-free, well ventilated place.

Keep all tools out of the reach of children.

Always switch off the power tool and disconnect it from the power supply (remove the battery/unplug the power cord) before transport.

Always carry the power tool using the purpose-designed handle.

Ensure that the power tool is not at risk of tipping over or exposed to excessive vibration and shocks during transport, especially if the power tool will be transported by car or other vehicle.

NOTE

Operating temperature: 0-40 °C
Storage temperature: 20-60 °C

WARRANTY STATEMENT

Proof of purchase will be required before you make a warranty claim. Full warranty terms and conditions are available from your local distributor, they can be found on the JCB Tools website:

www.jcb-tools.com

**FOR ANY MACHINE SOLD OUTSIDE THE UK, PLEASE CONTACT THE
VENDOR FROM WHOM YOU PURCHASED THE MACHINE, AND/OR YOUR
LOCAL JCB TOOLS DISTRIBUTOR**

RETURNING YOUR PRODUCT

If you are returning your product, please contact the dealer for their returns policy.



DECLARATION OF CONFORMITY				
1.	PRODUCT(S) COVERED BY THIS DECLARATION:	Product: Product Code No.	JCB Professional 18V Orbital Sander JCB-18BPOS-125	
		Factory Reference No.	50B-KY09-125	
2.	IDENTIFICATION DETAILS OF MANUFACTURER:	Name: Address: Country:	Genpower Ltd. Isaac Way Pembroke Dock, SA72 4RW UK	
	AUTHORISED REPRESENTATIVE:	Name: Address: Country:	CW Brands Pty Ltd. 21 Ballantyne Road Kewdale WA 6105 Australia	
3.	THIS DECLARATION OF CONFORMITY IS ISSUED UNDER THE SOLE RESPONSIBILITY OF THE MANUFACTURER			
4.	OBJECT OF THE DECLARATION:	Product: Function:	JCB 18V Orbital Tool Dry sanding	
5i.	THE OBJECT OF THE DECLARATION DESCRIBED IN POINT 4 IS IN CONFORMITY WITH THE RELEVANT UNION HARMONISATION LEGISLATION:	2014/35/EU 2014/30/EU 2006/42/EC 2023/1542/EU 2019/1021/EU 1907/2006/EC 2011/65/EU	The Low Voltage Directive The Electromagnetic Compatibility Directive The Machinery Directive The Battery Regulation Persistent Organic Pollutants Regulation Registration, Evaluation, Authorisation, and Restriction of Chemicals The Restriction of Hazardous Substances Directive	
6.	REFERENCES TO THE RELEVANT HARMONISED SAFETY STANDARDS USED OR REFERENCES TO THE OTHER TECHNICAL SPECIFICATIONS IN RELATION TO WHICH CONFORMITY IS DECLARED:	EN 62841-1:2015+A11:2022 EN 62481-2-4:2014 EN ISO 12100:2010 IEC 62133-2:2017+A1:2021 UN 38.3: ST/SG/AC.10/11/Rev.7 EN IEC 55014-1:2021 EN IEC 55014-2:2021 EN 60335-1:2023+A11:2023 EN 60335-2-29:2021+A11:2024 EN 62233:2008	Electric motor-operated hand-held tools, transportable tools and lawn and garden machinery. Safety. General requirements Electric motor-operated hand-held tools, transportable tools and lawn and garden machinery. Safety - Particular requirements for hand-held sanders and polishers other than disc type Safety of machinery. General principles for design. Risk assessment and risk reduction Secondary cells and batteries containing alkaline or other non-acid electrolytes. Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications - Lithium systems Transport of Dangerous Goods, Manual of Tests and Criteria Electromagnetic compatibility. Requirements for household appliances, electric tools and similar apparatus. Emission Electromagnetic compatibility. Requirements for household appliances, electric tools and similar apparatus. Immunity. Household and similar electrical appliances. Safety - General requirements Household and similar electrical appliances. Safety - Particular requirements for battery chargers Measurement methods for electromagnetic fields of household appliances and similar apparatus with regard to human exposure	
7.	ADDITIONAL INFORMATION. THE TECHNICAL DOCUMENTATION FOR THE MACHINERY IS AVAILABLE FROM:	Name: Address: Country:	CW Brands Pty Ltd. 21 Ballantyne Road Kewdale WA 6105 Australia	
SIGNED FOR AND ON BEHALF OF: PLACE OF ISSUE: DATE OF ISSUE: NAME: FUNCTION: SIGNATURE:		Genpower Limited WALES, UK 20/04/2026 ROLAND J. LLEWELLYN MANAGING DIRECTOR 